

Using Agilent InfiniiMax Probes with Test Equipment other than Agilent Infiniium Oscilloscopes

Configuration Guide

The benefits of Agilent's award-winning InfiniiMax probes are not restricted to Agilent Infiniium oscilloscopes. A variety of accessories are available that allow you to use InfiniiMax probes with other test equipment, for example spectrum analyzers. Benefits of InfiniiMax probes include:

- Wide bandwidth (up to 12-GHz)
- Flat frequency response up to specified bandwidth
- Very low reactive circuit loading
- Differential or single-ended measurements
- Accessories to adapt to any probing challenge without compromising performance



This guide will walk you through the steps to configure an InfiniiMax probing system to meet your specific needs.

- Step 1** Select an InfiniiMax probe amplifier
- Step 2** Select probe heads and accessories
- Step 3** The rest of the package



Step 1

Select an InfiniiMax probe amplifier

Amplifier model number	Bandwidth
1130A	1.5 Ghz
1131A	3.5 Ghz
1132A	5 Ghz
1134A	6 Ghz
1168A	10 Ghz
1169A	12 Ghz

Table 1. Available InfiniiMax probe amplifiers

Step 2

Select probe heads and accessories


The minimum configuration required for a complete probing solution is a probe amplifier and a probe head.

Solder-in probe heads are ideal for hands-off access to fine-pitch components in high-density electronics. Solder-in probe heads are available to support bandwidths up to 12-GHz.


Socketed probe heads make it easy to move probes to various test points for hands-off probing. Socketed probe heads support measurement bandwidth up to 8-GHz.

Hand-held browser probe heads make hand-held probing easy with variable tip spacing and Z-axis compliance. The E2675A hand-held browser supports measurements up to 6-GHz. The N5382A hand-held microbrowser supports measurements up to 12-GHz.


Dual-SMA probe heads enable differential measurements up to 12-GHz on coax while requiring only one channel of the measuring instrument. This is the only solution for differential coaxial measurements on spectrum analyzers.

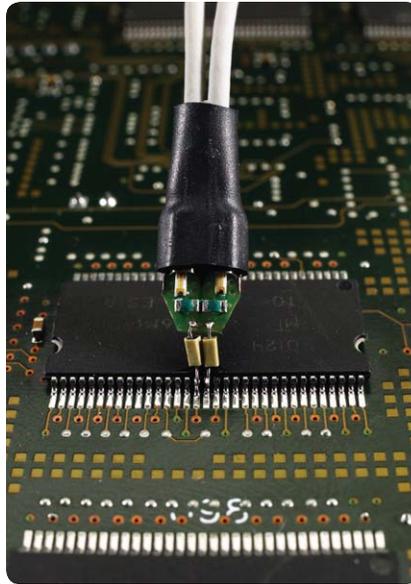

Solder-in probe head

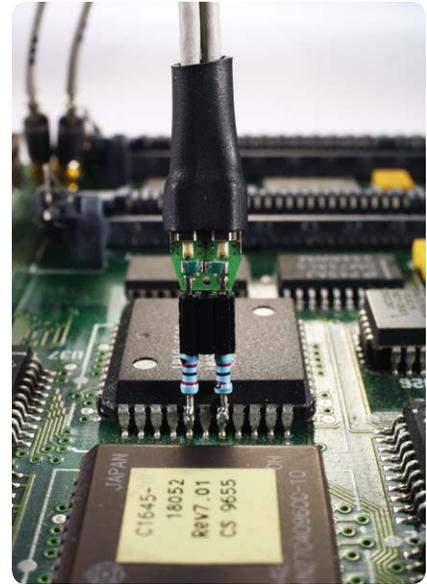

E2678A socketed probe head

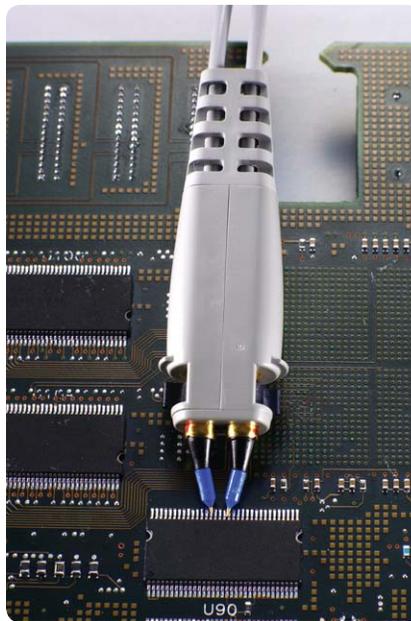

E2675A handheld browser probe head



Dual SMA probe head

Figure 1. InfiniiMax probe heads

Available probing accessories

E2668A connectivity kit for single-ended measurements. Includes one single-ended browser probe head, one single-ended solder-in probe head, and one socketed probe head, with all necessary accessories.

E2669A connectivity kit for differential measurements. Includes one differential browser probe head, four differential solder-in probe heads, and two socketed probe heads, with all necessary accessories.

E2675A differential browser probe head and accessories

E2676A single-ended browser probe head and accessories

E2677A differential solder-in probe head and accessories

E2678A differential/single-ended socketed probe head and accessories

E2679A single-ended solder-in probe head and accessories

E2695A 7-GHz dual differential SMA probe head

N5381A 12-GHz differential solder-in probe head ¹

N5382A 12-GHz differential browser probe head ¹

N5380A 12-GHz dual differential SMA probe head ¹

N5425A ZIF probe head²

¹ These heads are for use with the 1168A 10-GHz and 1169A 12-GHz probe amplifiers. They are designed to deliver full-bandwidth (10 or 12 GHz) measurement bandwidth to the probe tip.

² Can be used with either the N5426A ZIF tip or the N5451A long-wire ZIF tip

Table 1. Available probing accessories

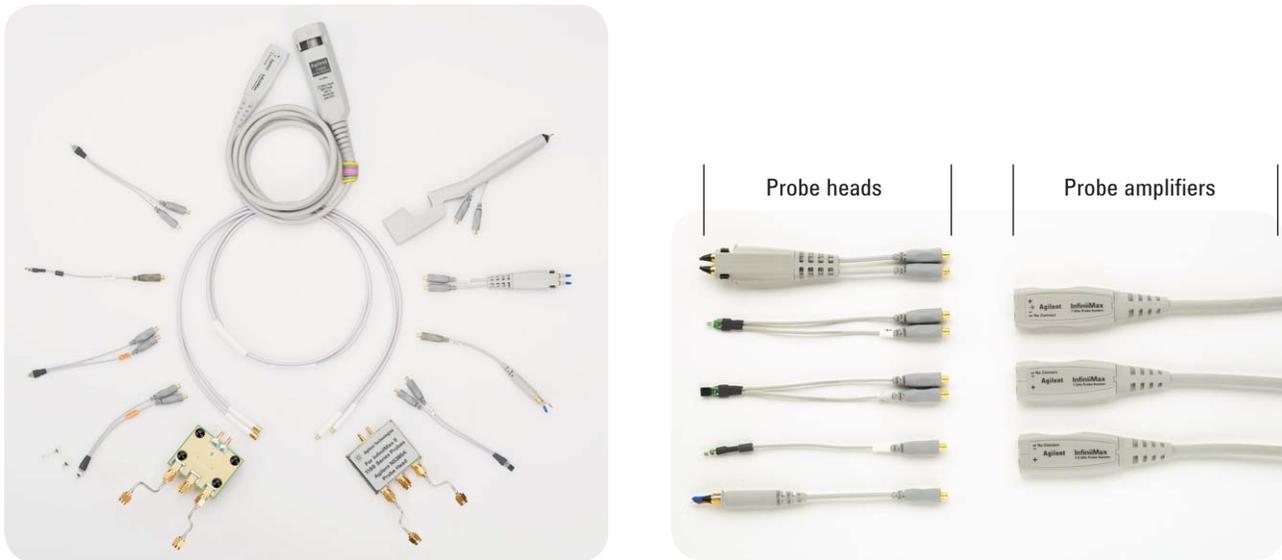


Figure 2. InfiniiMax probe heads combine with probe amplifiers for a flexible probing system.

Step 3

The rest of the package

Order one each of the following items:

N1022B probe adapter

N1022-60014 3.5 mm NMD to type N adapter

1143A probe power supply with option 001, 1.5 m extension cable

The 1143A probe power supply will support two InfiniiMax probes. If you need dual probes for two channel measurements, you can order two probes with accessories, two of each adapter listed above, and one power supply.

Figure 3 shows how to assemble all the components into a general-purpose probing solution.

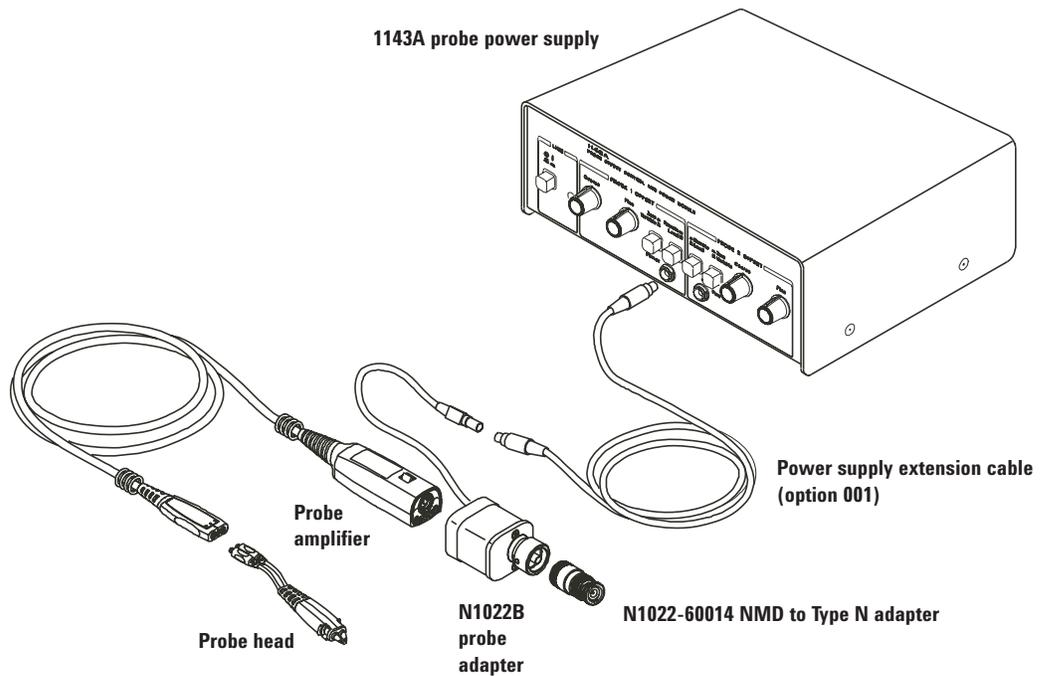


Figure 3. A complete InfiniiMax general-purpose probing system

Key characteristics and ordering information

Probe amplifier model	Bandwidth ¹	Gain
1130A	1.5 GHz	0.1
1131A	3.5 GHz	0.1
1132A	5 GHz	0.1
1134A	7 GHz	0.1
1168A	10 GHz	0.345
1169A	12 GHz	0.345

¹ The system bandwidth depends on the combination of probe amplifier and probe head. The bandwidth of any given combination will be the lower of the probe amplifier bandwidth from Table 2 and the probe head bandwidth from Table 3.

Table 2. Probe amplifiers

Model number	Description	Bandwidth
E2675A	differential browser probe head and accessories	6 GHz
E2676A	single-ended browser probe head and accessories	5.5 GHz
E2677A	differential solder-in probe head and accessories	7 GHz
E2678A	differential/single-ended socketed probe head and accessories	7 GHz
E2679A	single-ended solder-in probe head and accessories	5.2 GHz
E2695A	7-GHz dual differential SMA probe head	7 GHz
N5380A	12-GHz dual differential SMA probe head	12 GHz
N5381A	12-GHz differential solder-in probe head	12 GHz
N5382A	12-GHz differential browser probe head	12 GHz
N5425A	ZIF probe head with ZIF tip	10 GHz ¹
with N5426A ZIF tip		12 GHz ²
N5425A	ZIF probe head with long-wire ZIF tip	9.9 GHz ³
with N5451A long-wire ZIF tip		5 GHz ⁴

¹ with 1168A probe amplifier

² with 1169A probe amplifier

³ with resistor length of 7 mm and 0 ° span

⁴ with resistor length of 11 mm and 0 ° span

Table 3. Probe heads



Agilent Technologies Oscilloscopes

Multiple form factors from 20 MHz to >90 GHz | Industry leading specs | Powerful applications



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



www.axistandard.org AdvancedT-

CA® Extensions for Instrumentation and Test (AXIe) is

an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Agilent is a founding member of the AXIe consortium.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Agilent is a founding member of the LXI consortium.



www.pxisa.org

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.

Agilent Channel Partners

www.agilent.com/find/channelpartners

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.

Windows® is a U.S. registered trademark of Microsoft Corporation.



Agilent Advantage Services is committed to your success throughout your equipment's lifetime. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair and reduce your cost of ownership. You can also use Infoline Web Services to manage equipment and services more effectively. By sharing our measurement and service expertise, we help you create the products that change our world.

www.agilent.com/find/advantageservices



For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3500
Mexico	01800 5064 800
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

Europe & Middle East

Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 131 452 0200

For other unlisted countries:

www.agilent.com/find/contactus

Revised: June 8, 2011

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2011
Published in USA, July 28, 2011
5989-1869EN

