

N9064A & W9064A

Self-Guided Demonstration

This document will guide you through a typical usage scenario for an Agilent X-Series signal analyzer with the VXA vector signal analysis measurement application.



## Minimum Equipment and Measurement Application Configuration Requirements

All demonstrations utilize an X-Series signal analyzer with N9064A-1FP, 2FP. Keystrokes surrounded by [] indicate front-panel hardkeys; softkey operations located on the right edge of the display are surrounded by {}.

In this document, a quick demonstration will guide you through QPSK modulation analysis measurements.

# N/W9064A-1FP vector signal analysis (required)

Option 1FP is the foundation of the N9064A measurement application, offering basic vector signal analysis with SCPI programming and front panel operation on an X-Series signal analyzer. It provides:

- Spectrum analysis and time domain analysis with signal tracking
- Band power, occupied bandwidth, and ACP measurements
- · Markers, marker coupling, triggering
- · Time gating
- Frequency counter
- Analog demodulation measurements

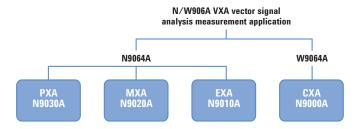


Figure 1. The N9064A runs inside of the PXA, MXA, and EXA signal analyzers, while the W9064A runs inside of the CXA signal analyzer  $\frac{1}{2}$ 

# N/W9064A-2FP flexible digital modulation analysis

Option 2FP offers a complete set of modulation quality measurements for:

- MSK, QPSK, 8PSK, BPSK, π/4 DQPSK, π/8 D8PSK, D8PSK, offset QPSK
- QAM12, 32, 64, 128, 256, 512, 1024
- DVB QAM16, 32, 64, 128, 256
- FSK 2, 4, 8, 16 states
- VSB8, VSB16
- APSK16, 32, 16 w/dub, 32 w/dub
- Cellular: IS-95 base and mobile, GSM, EDGE, CDPD, NADC, PDC, PHP, 3GPP (W-CDMA)
- Wireless networking: 802.11b, HIPERLAN/1(HBR and LBR), Bluetooth®, ZigBee 868, 915, and 2450
- Digital video: DTV8 16, DVB16 – 256, DVB 16APSK with code rate 2/3 to 9/10, DVB32 APSK with code rates ¾ to 9/10

### **Demonstration**

## QPSK modulation analysis measurements

You can adjust the following parameters when making digital modulation measurements with VXA measurement application Option 2FP:

- Modulation format (QAM, PSK, MSK, FSK, DVBQAM, VSB, APSK)
- · Symbol rate
- · Measurement interval (10 to 4096)
- · Points/symbol (1 to 20)
- Gain imbalance /quad skew coupling On/Off
- Measurement filter (no filter, RRC, Gaussian, EDGE, CDMA (IS-95 Base EQ), rectangular, low pass, user defined)
- Reference filter (raised cosine, RRC, Gaussian, EDGE, CDMA (IS-95 Base), rectangular, half sine, user-defined)
- Alpha/BT (0.05 to 100)
- · Burst/sync search

In this demonstration, the settings for the signal generator are:

- Center frequency = 1 GHz
- Level = -10 dBm
- Symbol rate = 1 MHz
- Modulation type = QPSK
- Filter = Root Nyquist
- Filter alpha = 0.35

Configure the VXA application in the X-Series signal analyzer as follows:

| Instructions  | Keystrokes   |
|---|--|
| Connect the RF output of the signal generator to the RF input of the X-Series signal analyzer |  |
| Enter the VXA application   | [Mode] > {Vector Signal Analyzer (VXA)}  |
| Preset the measurement mode   | [Mode preset]  |
| Set the analyzer's center frequency to 1 GHz  | {Cent Freq} > [1] > [GHz]  |
| Select digital modulation analysis  | [Meas] > {Digital Demod}   |
| Change demod setups   | [Meas Setup] > {Demod Setup}: Set modulation format = QPSK Symbol rate = 1 MHz Alpha/BT = 0.35 |

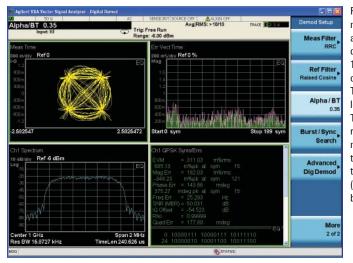


Figure 2. QPSK modulation analysis in default quad view: Trace 1 (upper left), IQ constellation; Trace 2 (lower left), spectrum; Trace 3 (upper right), error vector magnitude versus time (symbol) trace; Trace 4 (lower right), symbols/error table

### Tips for digital modulation analysis

The following steps are useful when analyzing digitally modulated signals:

- Look at the IQ constellation or vector diagram for obvious over/ undershoot.
- Examine the symbols/error table and note the rms EVM.
- Look at the symbols/error for quadrature and IQ imbalance errors.
- Look at IQ error phase versus time for magnitude and phase error.
   Phase noise will appear random.
   Incidental modulation will appear as a discernible waveform.

- Examine the EVM time trace.
   Where are the errors? At symbol times, or in between symbols?
   Where on the burst?
- Examine the EVM spectrum, which shows the spectrum of the error signal. In most digital systems, non-uniform noise distribution or discrete signal peaks indicate the presence of externally coupled interference.

#### www.agilent.com

### Web

Product page:

www.agilent.com/find/N9064A and www.agilent.com/find/W9064A

X-Series measurement applications: www.agilent.com/find/X-Series Apps

X-Series signal analyzers: www.agilent.com/find/X-Series



Agilent Advantage Services is committed to your success throughout your equipment's lifetime. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair and reduce your cost of ownership. You can also use Infoline Web Services to manage equipment and services more effectively. By sharing our measurement and service expertise, we help you create the products that change our world.

www.agilent.com/find/advantageservices



www.agilent.com/quality

Agilent Email Updates

www.agilent.com/find/emailupdates
Get the latest information on the
products and applications you select.



#### www.lxistandard.org

LXI is the LAN-based successor to GPIB, providing faster, more efficient connectivity. Agilent is a founding member of the LXI consortium.

#### **Agilent Channel Partners**

www.agilent.com/find/channelpartners
Get the best of both worlds: Agilent's
measurement expertise and product
breadth, combined with channel
partner convenience.

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

#### www.agilent.com/find/contactus

#### **Americas**

| Canada        | (877) 894 4414 |
|---------------|----------------|
| Brazil        | (11) 4197 3600 |
| Mexico        | 01800 5064 800 |
| United States | (800) 829 4444 |

#### **Asia Pacific**

| Australia          | 1 800 629 485  |
|--------------------|----------------|
| China              | 800 810 0189   |
| Hong Kong          | 800 938 693    |
| India              | 1 800 112 929  |
| Japan              | 0120 (421) 345 |
| Korea              | 080 769 0800   |
| Malaysia           | 1 800 888 848  |
| Singapore          | 1 800 375 8100 |
| Taiwan             | 0800 047 866   |
| Other AP Countries | (65) 375 8100  |

#### **Europe & Middle East**

| Belgium        | 32 (0) 2 404 93 40   |
|----------------|----------------------|
| Denmark        | 45 45 80 12 15       |
| Finland        | 358 (0) 10 855 2100  |
| France         | 0825 010 700*        |
|                | *0.125 €/minute      |
| Germany        | 49 (0) 7031 464 6333 |
| Ireland        | 1890 924 204         |
| Israel         | 972-3-9288-504/544   |
| Italy          | 39 02 92 60 8484     |
| Netherlands    | 31 (0) 20 547 2111   |
| Spain          | 34 (91) 631 3300     |
| Sweden         | 0200-88 22 55        |
| United Kingdom | 44 (0) 118 927 6201  |
|                |                      |

For other unlisted countries:

#### www.agilent.com/find/contactus

Revised: January 6, 2012

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2012 Published in USA, October 3, 2012 5990-6159EN

