


Agilent IO Libraries Suite 16

Data Sheet

Accelerate instrument connection and control with IO Libraries.

- Automatically detects instruments connected to your PC and configures the interfaces.
- Compatible with the most common instruments including AXIe, PXI, GPIB, USB, Ethernet/LAN, RS-232, and VXI test instruments from a variety of vendors.
- Enables instrument communication for a variety of development environments (Mathworks MATLAB, Agilent VEE Pro, NI LabVIEW, Microsoft Visual Studio[®] and more).
- Includes access to Command Expert a new software tool for easy instrument control.

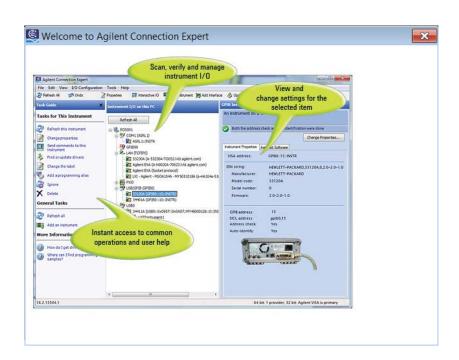



Getting started is easy!



- 1. Install Agilent IO Libraries Suite software on your PC.
- Connect the interface cables between your chassis and/or instruments, and your PC.
- 3. **Detect** interfaces, chassis, and instruments and configure them using Agilent Connection Expert.

In just minutes you have an error-free connection that simply works.



With more features and capabilities, you have more choices than ever before

New in Agilent IO Libraries Suite 16...

Support for modular instruments - Agilent VISA and Connection Expert now support modular instruments such as PXI (PCI eXtensions for Instrumentation), PXIe (PCI eXpress eXtensions for Instrumentation), and PCIe™ (PCI EXPRESS®) devices. The PXI Resource manager will discover and display chassis and modules. Since a single platform isn't the right answer for every test scenario, Agilent IO Libraries Suite continues to add new interfaces and new capabilities to the connectivity software.

Command Expert is a new FREE software application that provides fast and easy instrument control in many PC application environments. Command Expert can be launched from the Connection Expert Tools menu. If this menu choice is grayed out, you need to install Command Expert. You can install Command Expert from the Automation-Ready CD or you can download Command Expert from:

www.agilent.com/find/commandexpert.

Support for the HiSLIP protocol for LAN-based instruments — HiSLIP speed is faster than any other current interface, and for some instruments can approach the theoretical limit of Gigabit LAN for TCPIP connections. This allows up to five times faster query/response transactions and bulk data transfers while still supporting the instrument-like capabilities of conventional test and measurement protocols like VXI-11. You can easily convert an existing VXI-11 program to HiSLIP by simply changing the address string. In addition, support for Internet Protocol Version 6 (IPv6) has been added for instrument addressing for HiSLIP and Raw Sockets LAN-based instruments.

Easier ways to find and update instrument and soft front panel drivers - Connection Expert now allows you to search for, verify, and update IVI® instrument and soft front panel drivers from the instrument properties view. This will save you time and ensure that the most up to date driver is being used in your application.

Easier to debug programs -

IO Monitor lets you monitor and debug calls through new Agilent IVI instrument drivers released after September 18, 2010. This ability to trace instrument I/O traffic can greatly simplify and speed up the debug process.


Automatic notification of

updates to the IO Libraries Suite software - When enabled, you can choose to be notified when a newer release of the Agilent IO Libraries Suite is available. As features are added, you will be alerted and can download the software when it is convenient.

IVI USBTMC driver - This driver replaces the Agilent driver that was installed in previous versions of the IO Libraries. This new IVI driver is signed and authenticated by Microsoft and is compatible with VISA libraries from multiple vendors. It's another way of simplifying installation and setup of your system.





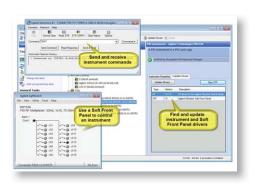

Specifications

Supported interfaces*

GPIB: standard IEEE 488.1

USB: USB 3.0 or lower (with USBTMC-USB488, USBTMC, and Composite protocol)

LAN/Ethernet: standard LAN (with HiSLIP, LXI, VXI-11, SICL-LAN and sockets)

RS-232/Serial, FireWire® (IEEE 1394)

PXI: AXIe, PXI, PXIe, PCI and PCIe devices

VXI: FireWire and GPIB-VXI (32/64-bit, not supported on Windows 8)

Supported development environments and supported I/O software

VB6: VISA COM, VISA, SICL, Agilent 488, Excel VBA
C/C++, Managed C++: VISA COM, VISA, Agilent 488

.NET languages (VB.NET, C#): VISA COM, VISA, Agilent 488

LabVIEW: VISA, Agilent 488

MATLAB: VISA

Note: Agilent IO Libraries Suite supports VEE Pro program development with drivers and/or Direct IO.

I/O utilities

., • 4	
Connection Expert	Automatically scans and configures your instrument IO, helps you get connected quickly and easily and displays the status of your interfaces and instruments.
Interactive IO	Lets you quickly send commands to instruments and read responses.
Interactive LXI	Allows you to send and receive LXI events, monitor, and manage LXI instrument precision clocks.
10 Monitor	Lets you monitor and debug I/O calls made on any of Agilent's supported buses using Agilent SICL, VISA, VISA COM, or Agilent IVI instrument drivers (released after September 18, 2010)
10 control	Provides easy access to the IO Libraries Suite from the Windows system tray.
VXI resource manager	Provides configuration of the IEEE 1394 connection from PC to VXI.
viFind32	Debug utility uses VISA functions to find resources and lists them in a console window.

^{*} See the latest information on supported interfaces and operating systems for IO Libraries Suite 16 at www.agilent.com/find/iolib_revmatrix. To identify which versions of IO Libraries support particular operating system and interface combinations, go to www.agilent.com/find/iolib_osmatrix.

System Requirements: Agilent IO Libraries Suite 16

PC software: Operating system

- Windows 8 32-bit and 64-bit (Windows 8, Windows 8 Pro, and Windows 8 Enterprise)
- Windows 7 SP1 32-bit and 64-bit (Starter, Home Basic, Home Premium, Professional, Ultimate, Enterprise)
- Windows Vista® SP1 and SP2 32-bit and 64-bit (Home Basic, Home Premium, Business, Ultimate, Enterprise Editions)
- Windows XP SP3 32-bit (Professional and Home)
- Windows Server 2012 64-bit (Standard)
- Windows Server 2008 R2 SP1, 64-bit (Standard and Enterprise)

PC hardware

- Processor: 600 MHz class (800 MHz or greater recommended)
- RAM: Windows XP: 256 MB minimum

(1 GB or greater recommended)
Windows Vista or Windows 7:
1 GB minimum

- Hard disk space required: 1.5 GB
- Display: 1024 x 768 96 or 120 DPI
- Input device: Microsoft mouse or compatible pointing device
- Device for installation: CD-ROM
- Web connection for installation, upgrades and drivers

I/O software compatibility

With multiple vendor I/O software installed, you get the best solution with Agilent's open IO Libraries Suite. For instance, during installation the IO Libraries Suite automatically detects NI's software and safely installs the Suite in a side by side mode. This allows the existing I/O software and the Agilent software to work together.

Ordering information

The Agilent IO Libraries Suite is delivered to you on the *Automation-Ready CD*.

If you would like to upgrade to the latest version of IO Libraries Suite, download the free software at:

www.agilent.com/find/iosuite

Automation-Ready CD contents

- · 10 Libraries Suite
 - I/O libraries: VISA, VISA COM, SICL, Agilent 488, Agilent LXI Event and Precision Time Protocol (PTP) Managers .NET API and C API.
 - Connection Expert
 - I/O utilities
 - Quick Start Guide, Connectivity Guide and full online help for all I/O Libraries
- · Agilent Command Expert installation
- Version 2.2.1 of the IVI Shared Components

(see www.ivifoundation.org/)

- Microsoft .NET Framework 2.0 SP2
- Microsoft .NET Framework 4.0

www.agilent.com www.agilent.com/find/iosuite



www.agilent.com/find/emailupdates
Get the latest information on the
products and applications you select.



www.axiestandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Agilent is a founding member of the AXIe consortium.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Agilent is a founding member of the LXI consortium.



www.pxisa.org

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.



Agilent Advantage Services is committed to your success throughout your equipment's lifetime. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair and reduce your cost of ownership. You can also use Infoline Web Services to manage equipment and services more effectively. By sharing our measurement and service expertise, we help you create the products that change our world.

www.agilent.com/find/advantageservices



www.agilent.com/quality

FireWire is a registered trademark of Apple Computer, Inc.

IVI is a registered U.S. trademark of the IVI Foundation, Inc.

LXI is a registered U.S. trademark of the LXI Consortium, Inc.

Microsoft is either a registered trademark or a trademark of Microsoft Corporation in the United States and/or other countries.

PCIe is a registered trademark and/or service mark of PCI-SIG.

PXI is a registered US trademark of the PXI Systems Alliance, Inc.

Windows and MS Windows are U.S. registered trademarks of Microsoft Corporation.

Windows Vista is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries.

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3600
Mexico	01800 5064 800
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

Europe & Middle East

Belgium	32 (0) 2 404 93 40
Denmark	45 45 80 12 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 118 927 6201

For other unlisted countries:

www.agilent.com/find/contactus

Revised: January 6, 2012

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2012 Published in USA, October 8, 2012 5990-6770EN

